

4

3

2

1

D

D

C




C

B

B

A

A

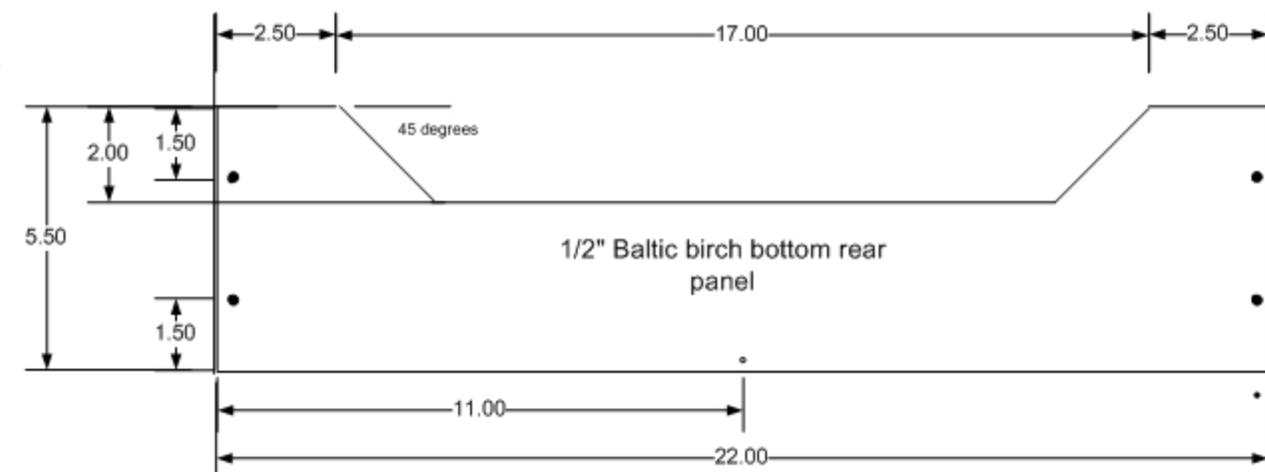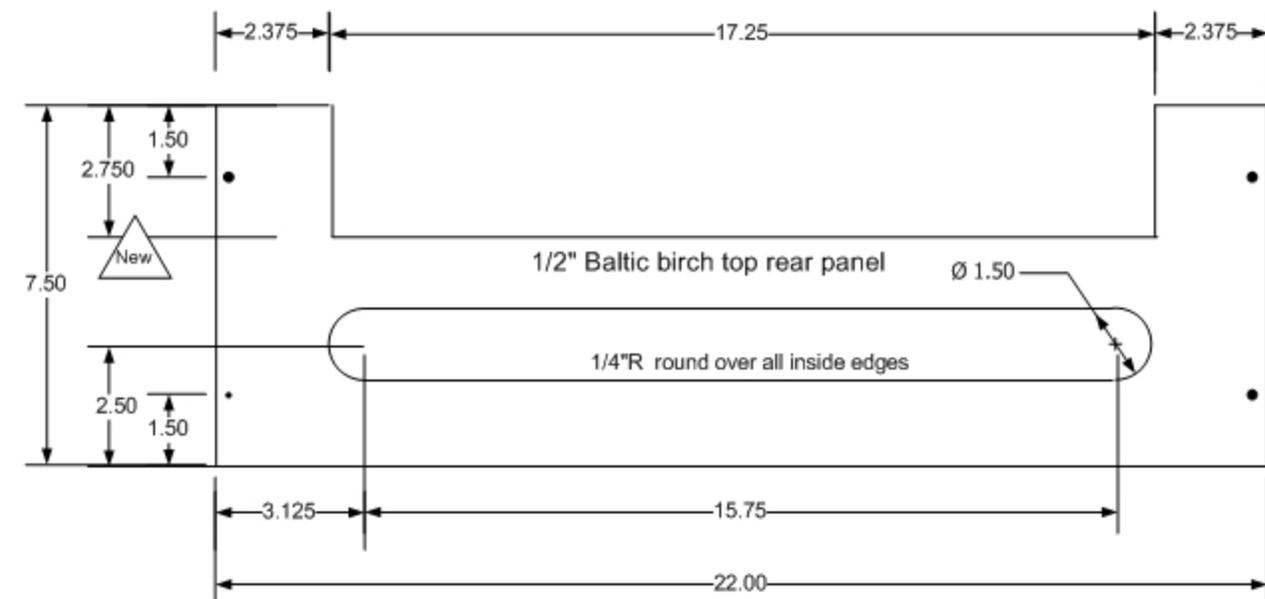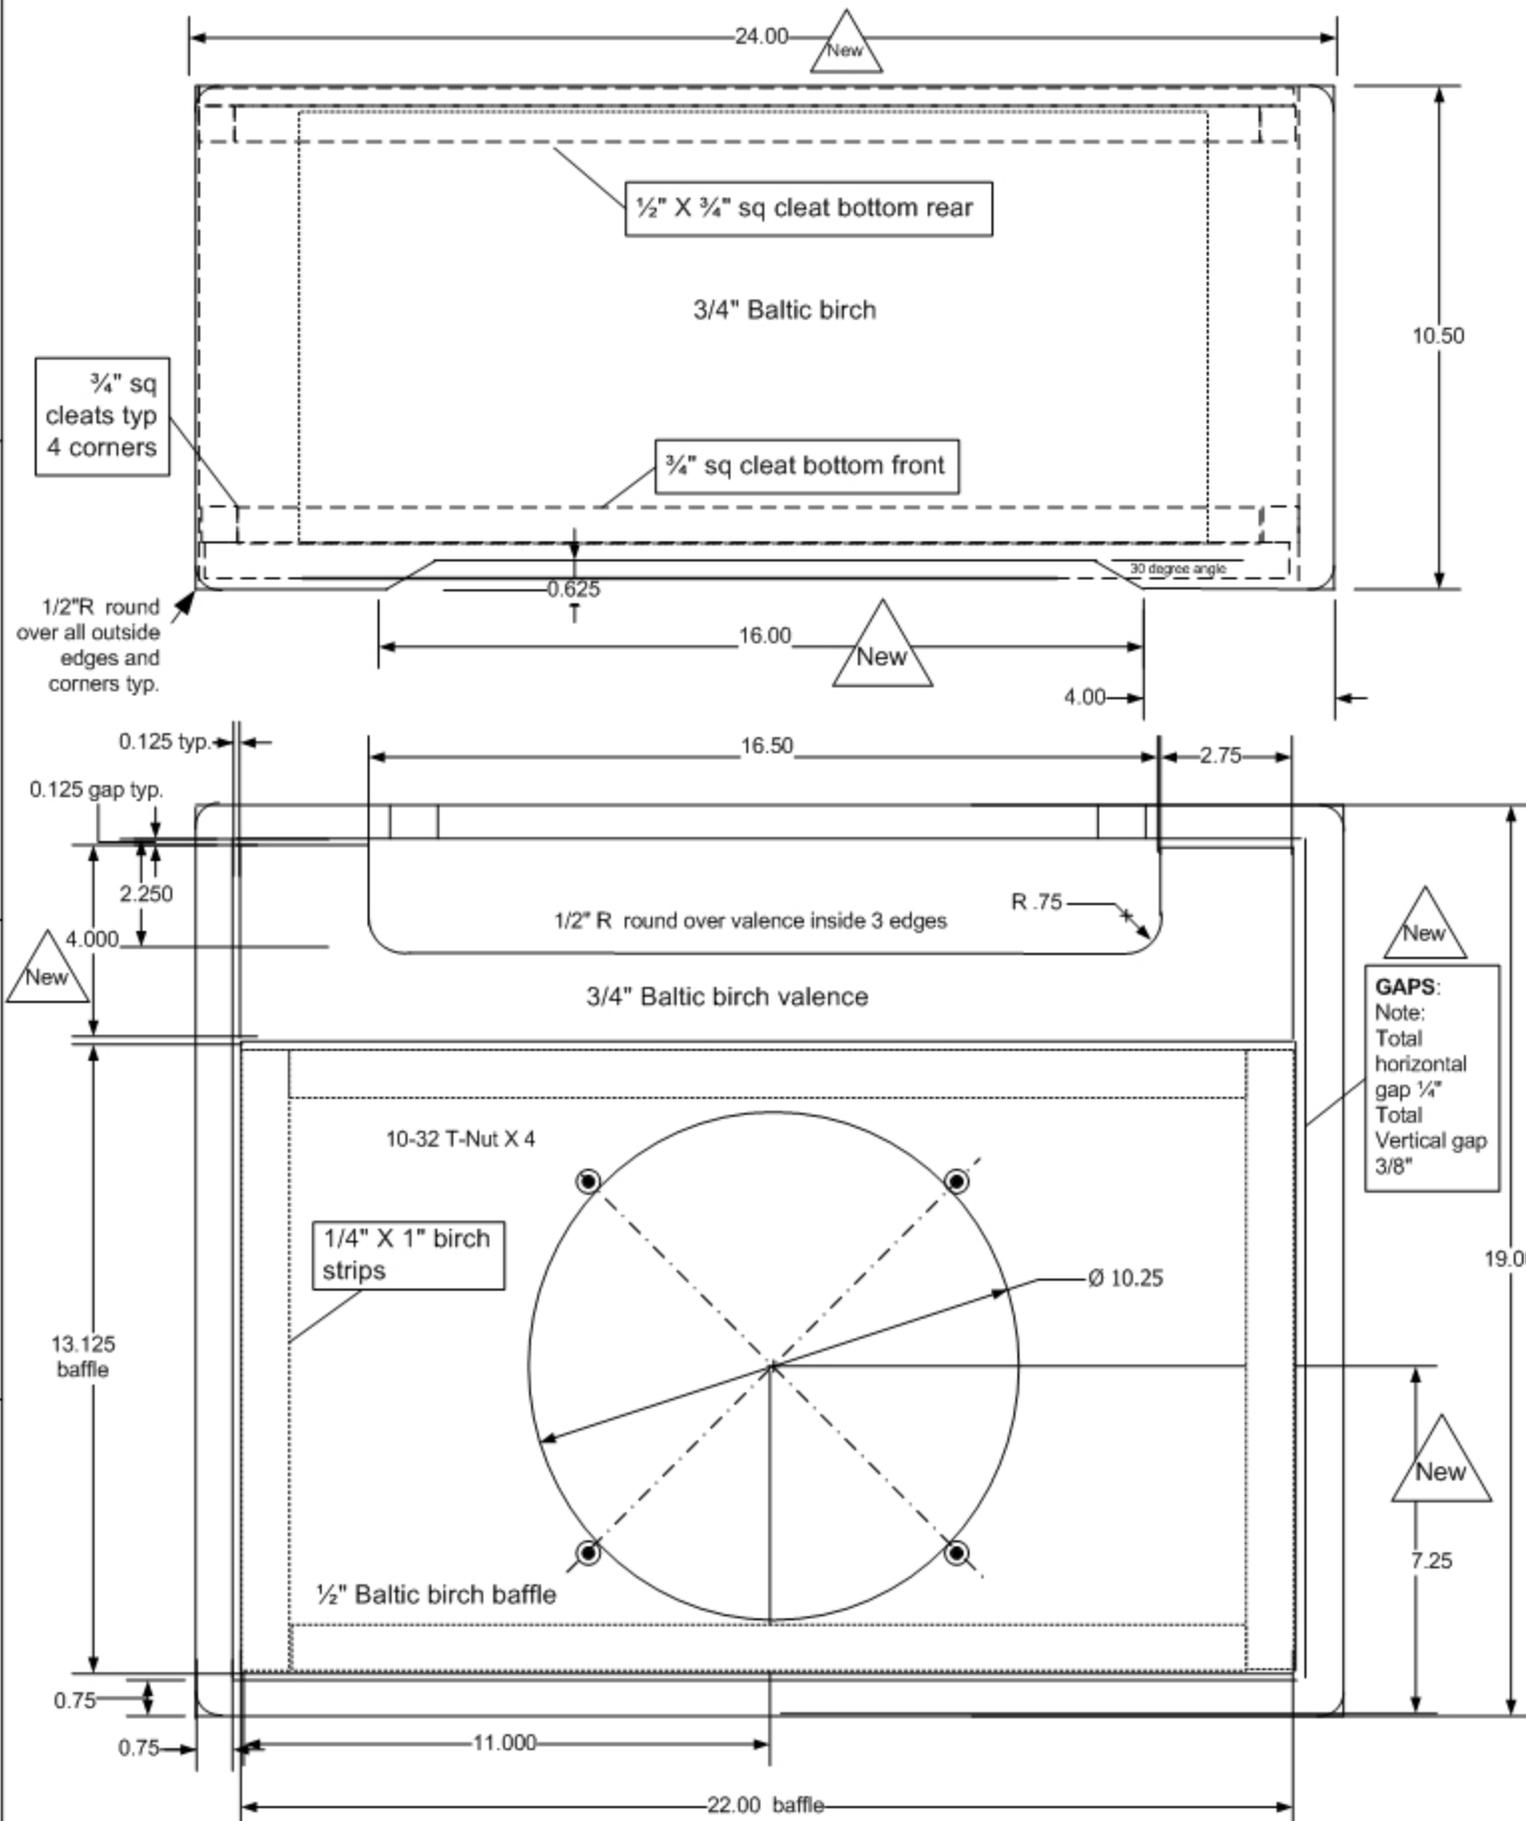

**GAPS:**  
 Note:  
 Total horizontal gap 1/4"  
 Total Vertical gap 3/8"

### TRINITY 15 CABINET - CONSTRUCTION NOTES

Allow for 1/4" less width and 3/8" less height than the cabinet inside dimensions when measuring front baffle and valence dimensions to allow for piping, grill cloth and Tolex.

Set back cleats from front edge by 1" Set back front valence 1/4" from front of cabinet. Inside cabinet clearance should be 9". Chassis dimensions: 17" X 2-1/2" X 9"

Use 3/4" **Baltic birch** for the cabinet and the front valence and 1/2" Baltic Birch for the baffle and rear panels. All the joints are 1/4" finger jointed. Install 1/4" X 1" strips around the perimeter of the baffle to raise up the grill cloth. Cleats to attach the front and rear panels are 3/4" square Baltic birch pieces but hardwood could be used. Round off all the corners with a 1/2" radius router bit. Use Mesa Wrinkle Tolex and a nice grey weave grill cloth. Use white piping from an auto upholstery place or Musical supply.

The handle is the dog-bone leather style and the feet are 1-1/4" diameter rubber. Use black metal half-wrap corners fastened with black screws. Original cabinet dimensions from John Irvine, altered slightly to suit.

www.trinityamps.com April 9, 2005

revised Oct. 30, 2007

4

3

2

1