



COMPRESSOR

4 KNOB

SIDE A

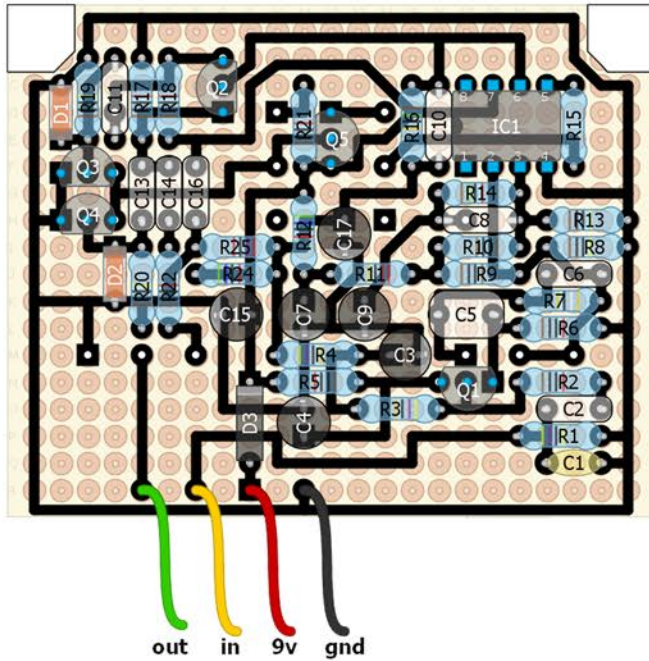

SIDE B

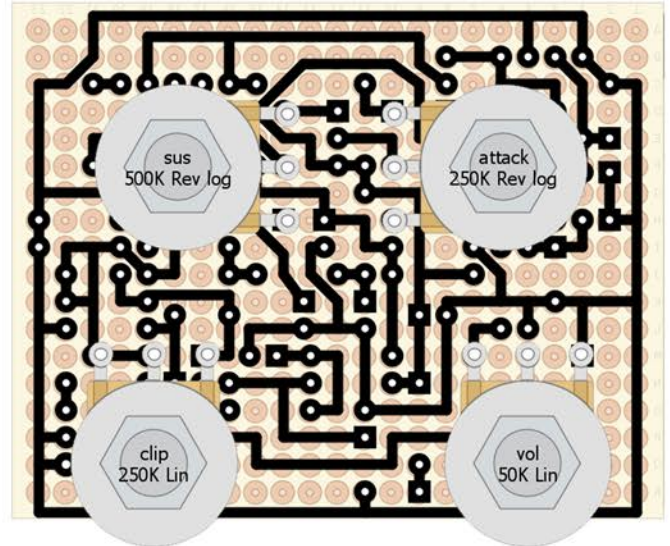


Component	Name	Value	Quantity	Effect	Type
res 1%	R1	4,7M/	1	4 knob	Compressor
res 1%	R2,R5,R6,R17,R18,R21,R22	10K	7	4 knob	Compressor
res 1%	R3,R4	470K	2	4 knob	Compressor
res 1%	R7	390K	1	4 knob	Compressor
res 1%	R8,R13,R19,R20	1M	4	4 knob	Compressor
res 1%	R9,R10	1K	2	4 knob	Compressor
res 1%	R11	220K	1	4 knob	Compressor
res 1%	R12,R24	56K	2	4 knob	Compressor
res 1%	R14	15K	1	4 knob	Compressor
res 1%	R15	27K	1	4 knob	Compressor
res 1%	R16	150K	1	4 knob	Compressor
res 1%	R25	27K	1	4 knob	Compressor
cap film	C1	150pF	1	4 knob	Compressor
cap film	C2,C8,C11,C13	10nF	4	4 knob	Compressor
cap film	C5	1uF	1	4 knob	Compressor
cap film	C6	2,2nF	1	4 knob	Compressor
cap film	C10	1nF	1	4 knob	Compressor
cap film	C16	100nF	1	4 knob	Compressor
cap film	C14	47nF	1	4 knob	Compressor
cap elettr +	C3,C4,C7,C9	1uF	4	4 knob	Compressor
cap elettr +	C15	100uF	1	4 knob	Compressor
cap elettr +	C17	10uF	1	4 knob	Compressor
Diode	D1,D2	1N914	2	4 knob	Compressor
Diode	D3	1n5817	1	4 knob	Compressor
IC	IC1	lm3080	1	4 knob	Compressor
transistor	Q1.Q2.Q3.Q4.Q5	2n3904	5	4 knob	Compressor
Potentiometer	sus	500K Rev log	1	4 knob	Compressor
Potentiometer	vol	50K Lin	1	4 knob	Compressor
Potentiometer	attack	250K Rev log	1	4 knob	Compressor
Potentiometer	clip	250K Lin	1	4 knob	Compressor
TEST					
res 1%	R1	1M	1	4 knob	Compressor
res 1%	R12	220K	1	4 knob	Compressor
cap elettr +	C15	220uF	1	4 knob	Compressor
cap elettr +	C17	47uF	1	4 knob	Compressor

layout by  

COMPRESSOR

4 KNOB

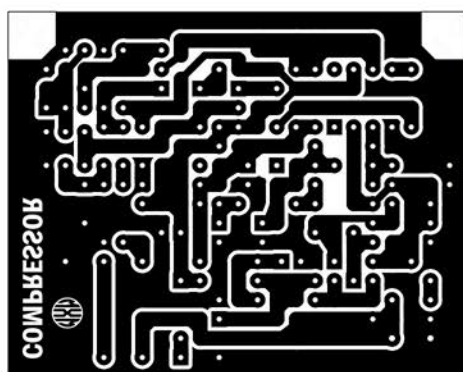

layout by **VbAM** 