


Tone Control Circuit

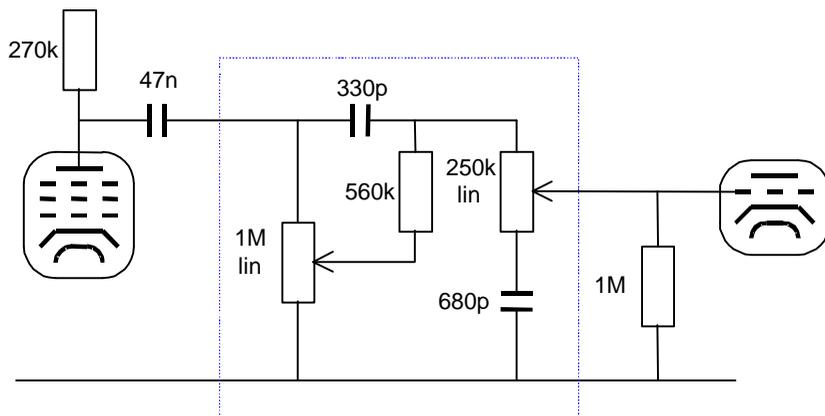

Source impedance: 220k (e.g. pentode with $R_a=270k$)

Frequency response: ± 1 dB from 10Hz to 100kHz (with pots in center position)

Potentiometer 1: +6, -12 dB @ 100Hz

Potentiometer 2: +6, -12 dB @ 10kHz