

Boss CS3 Mods


Part	Stock Value	Simple	Moon Glasses	Almighty Sunglasses	Hyper	DIY Italia	Indyguitarist	One	Sava Two	Three	Ovnilab	Part
R5	10k					470ohm	470ohm				470ohm	R5
R6	10k									12k		R6
R9	10k									12k		R9
R32	4.7k					Jumper	Jumper				Jumper	R32
R36	10k	2.2k	2.2k	2.2k	100ohm	100ohm	100ohm		4.7k		100ohm	R36
C1 pots-pcb	27nF					220nF	220nF	27nF	27nF		220-470nF	C1 pots-pcb
C1	100uF				220uF					100uF Tant.		C1
C2	22nF	100nF	100nF	100nF	100nF	100nF		47nF	100nF		470nF	C2
C3	47uF									47uF Tant.		C3
C4	1uF	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	C4
C5	1.8nF							560pF	560pF	1.5nF		C5
C6	1uF	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	C6
C7	10nF	47nF	47nF	47nF				10nF	10nF			C7
C8	10nF							10nF	10nF			C8
C9	10nF		47nF	47nF								C9
C10	47nF	100nF	100nF	100nF	100nF							C10
C13	47nF	47nF	47nF	47nF		2.2uF NP	2.2uF NP	47nF	100nF		2.2uF NP	C13
C14	1uF	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	C14
C15	47nF	47nF	47nF	47nF				47nF	100nF			C15
C16	47nF	100nF	100nF	100nF								C16
C17	1uF	1uF NP	1uF NP	1uF NP		1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	1uF NP	C17
C18	10nF	47nF	47nF	47nF								C18
D2	Si		1N34	1N34	1N34			1N34	1N34			D2
D3	Si		1N34	1N34	1N34			1N34	1N34			D3
D6	Si		1N34	1N34				1N34	1N34			D6
D10	Si					Jumper	Jumper				Jumper	D10
IC2	M5218L		Stacked OPA2134 2 Stacked & 4558									IC2

R32 and D10 are to find only on really Old CS3!

If values are the same, then it's intended to use a better quality component!

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

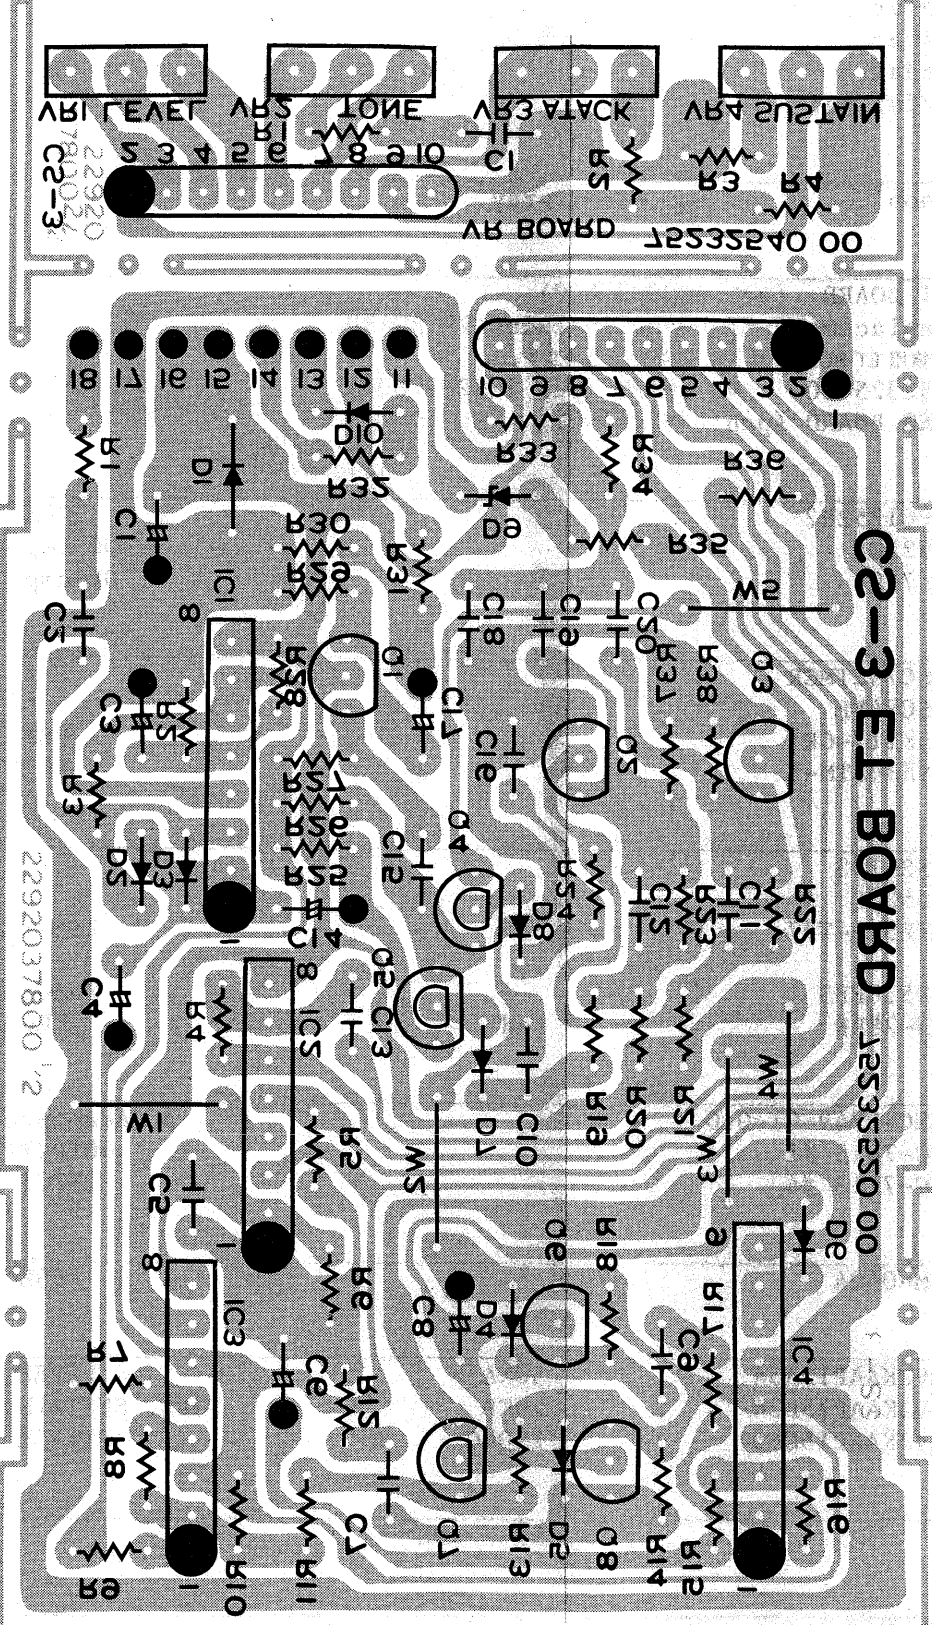

SOLDER SIDE 半田面

ET BOARD**7523252000** (pcb 2292037800)

Replacement ET BOARD includes VR BOARD

補修用 ET BOARD は VR BOARD を含みます。

VR BOARD 7523254000 (pcb 2292037800)**CIRCUIT DIAGRAM**