



You can build the Big Muff Pi and many of its variants on this layout. Markings for polarized capacitors can be ignored if using non polarized ones. Different diodes can be used for D1-D4 including LEDs. Off board components except for the potentiometers are not shown on the layout. Check out our "offboard wiring" project page at tonepad.com for offboard wiring options. Trademarks remain property of their owners and are used only for reference.

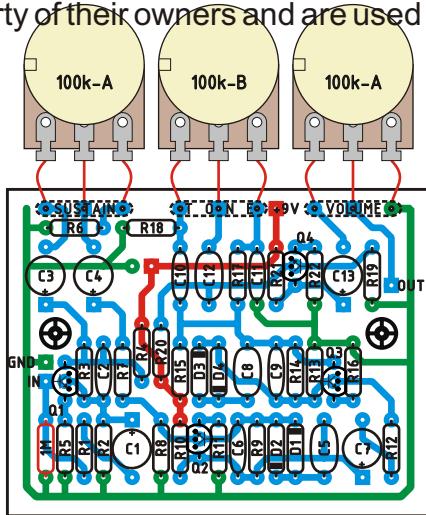

LAYOUT

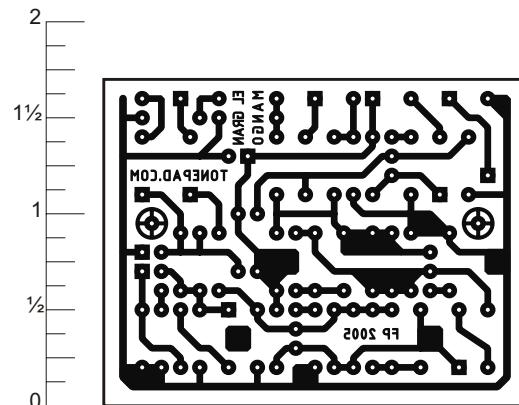

READY TO TRANSFER

Parts List (Stock Big Muff)**Resistors**

| | |
|-----------------|------------------|
| R1 - 39k | R12 - 8k2 (8.2k) |
| R2 - 100k | R13 - 100k |
| R3 - 470k | R14 - 470k |
| R4 - 15k | R15 - 15k |
| R5 - 100 ohm | R16 - 100 ohm |
| R6 - 1k | R17 - 39k |
| R7 - 8k2 (8.2k) | R18 - 100k |
| R8 - 100k | R19 - 100k |
| R9 - 470k | R20 - 390k |
| R10 - 15k | R21 - 10k |
| R11 - 100 ohm | R22 - 2k2 (2.2k) |

*1M resistor is for preventing pops when switching, it was not present in the original circuit

Capacitors

| |
|---------------|
| C1 - 1μF |
| C2 - 500pF |
| C3 - 1μF |
| C4 - 1μF |
| C5 - 0.1μF |
| C6 - 500pF |
| C7 - 1μF |
| C8 - 0.1μF |
| C9 - 500pF |
| C10 - 0.004μF |
| C11 - 0.01μF |
| C12 - 0.1μF |
| C13 - 1μF |

Potentiometers

- 2 - 100k-A (log. taper)
- 1 - 100k-B (linear taper)


Diodes

- 4 - 1N914

Transistors

- 4 - 2N5088


Layout and presentation by Francisco Peria 2001-2005®.
All rights reserved. Authorization for personal use only,
any commercial use is forbidden.
Permission for posting/serving limited to
<http://www.tonepad.com>
Permission refused for posting from other sites.

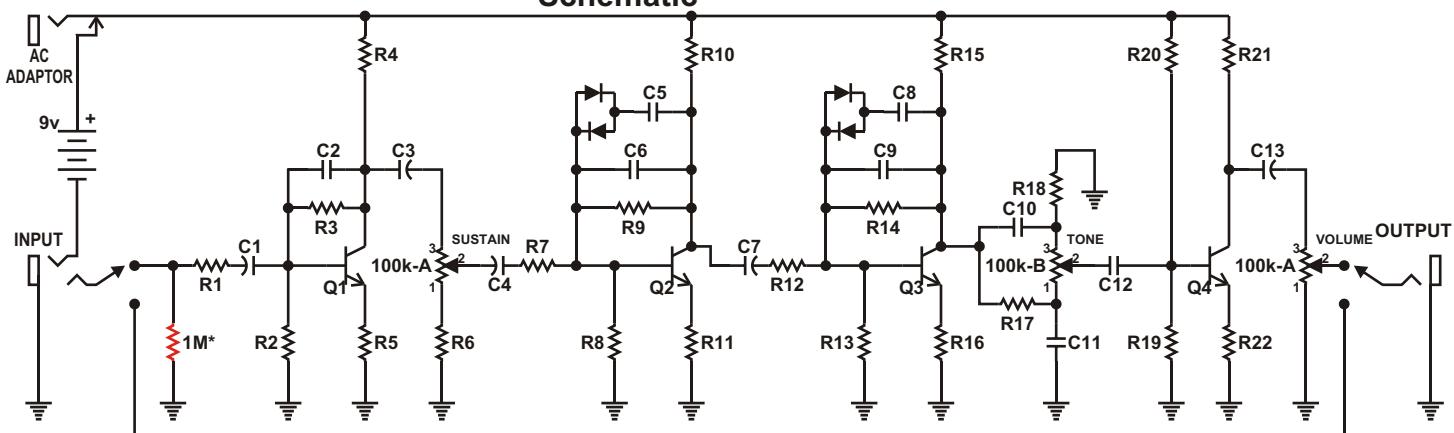Schematic


GRAN MANGO 3.1416 VARIANTS

Rev.1.Jun.14.2005


Variants and Mods. Many think the stock big muff has too much bass, these mods fix this by changing the 1uF coupling capacitors to 0.1uF, they also tweak the gain on each of the stages and also the tone stack. Trademarks remain property of their owners and are used only for reference.

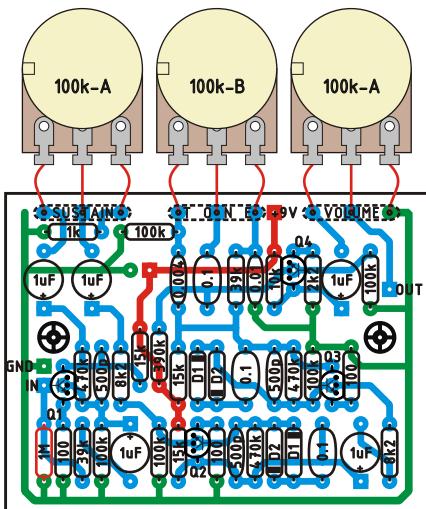

LAYOUT (Stock Big Muff)

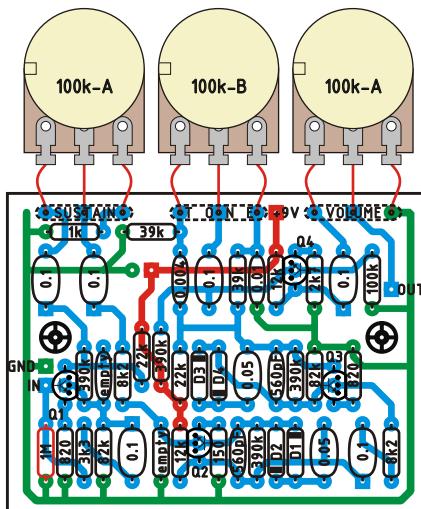

LAYOUT (Triangle Big Muff)

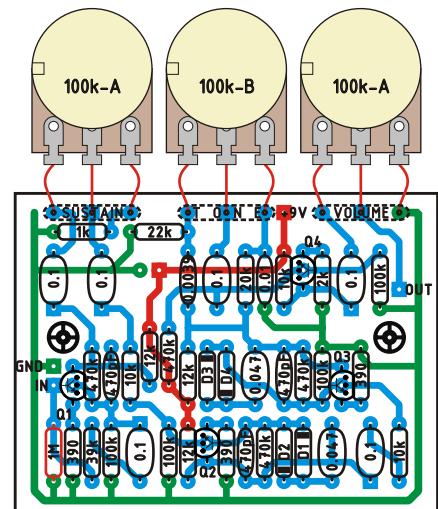

LAYOUT (Green Big Muff)

Parts List ("Triangle" Big Muff)

Resistors

| | |
|-----------------|------------------|
| R1 - 3k3 (3.3k) | R12 - 8k2 (8.2k) |
| R2 - 82k | R13 - 82k |
| R3 - 390k | R14 - 390k |
| R4 - 22k | R15 - 22k |
| R5 - 820 ohm | R16 - 820 ohm |
| R6 - 1k | R17 - 39k |
| R7 - 8k2 (8.2k) | R18 - 39k |
| R8 - nothing | R19 - 100k |
| R9 - 390k | R20 - 390k |
| R10 - 12k | R21 - 12k |
| R11 - 150 ohm | R22 - 2k7 (2.7k) |

Capacitors

| |
|---------------|
| C1 - 0.1μF |
| C2 - nothing |
| C3 - 0.1μF |
| C4 - 0.1μF |
| C5 - 0.05μF |
| C6 - 560pF |
| C7 - 0.1μF |
| C8 - 0.05μF |
| C9 - 560pF |
| C10 - 0.004μF |
| C11 - 0.01μF |
| C12 - 0.1μF |
| C13 - 0.1μF |

Potentiometers

| |
|---------------------------|
| 2 - 100k-A (log. taper) |
| 1 - 100k-B (linear taper) |

Diodes

| |
|-----------|
| 4 - 1N914 |
|-----------|

Transistors

| |
|------------|
| 4 - 2N5088 |
|------------|

Parts List ("Russian Green" Big Muff)

Resistors

| | |
|---------------|---------------|
| R1 - 39k | R12 - 10k |
| R2 - 100k | R13 - 100k |
| R3 - 470k | R14 - 470k |
| R4 - 12k | R15 - 12k |
| R5 - 390 ohm | R16 - 390 ohm |
| R6 - 1k | R17 - 20k |
| R7 - 10k | R18 - 22k |
| R8 - 100k | R19 - 100k |
| R9 - 470k | R20 - 470k |
| R10 - 12k | R21 - 10k |
| R11 - 390 ohm | R22 - 2k |

Capacitors

| |
|----------------|
| C1 - 0.1μF |
| C2 - 470pF |
| C3 - 0.1μF |
| C4 - 0.1μF |
| C5 - 0.047μF |
| C6 - 470pF |
| C7 - 0.1μF |
| C8 - 0.047μF |
| C9 - 470pF |
| C10 - 0.0039μF |
| C11 - 0.01μF |
| C12 - 0.1μF |
| C13 - 0.1μF |

Potentiometers

| |
|---------------------------|
| 2 - 100k-A (log. taper) |
| 1 - 100k-B (linear taper) |

Diodes

| |
|-----------|
| 4 - 1N914 |
|-----------|

Transistors

| |
|------------|
| 4 - 2N5088 |
|------------|

Layout and presentation by Francisco Peria 2001-2005®.
All rights reserved. Authorization for personal use only,
any commercial use is forbidden.
Permission for posting/serving limited to
<http://www.tonepad.com>
Permission refused for posting from other sites.