



HANDMADES

WWW.HANDMADES.COM.BR


TECNOLOGIA A FAVOR DA MÚSICA

ROCKETT BLUE NOTE OVERDRIVE


Traced/Schematic by: Greg-G (FreeStompBoxes.org)

Layout by: Güero 2.0


Layout

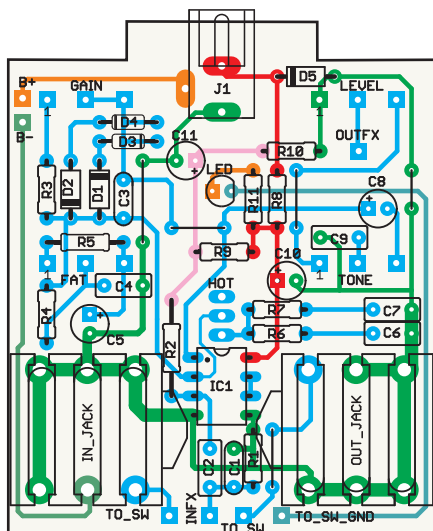

Ready to transfer

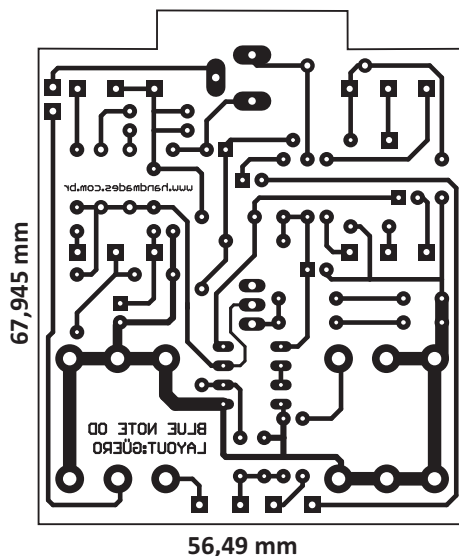

Drill template - Hammond 1590b

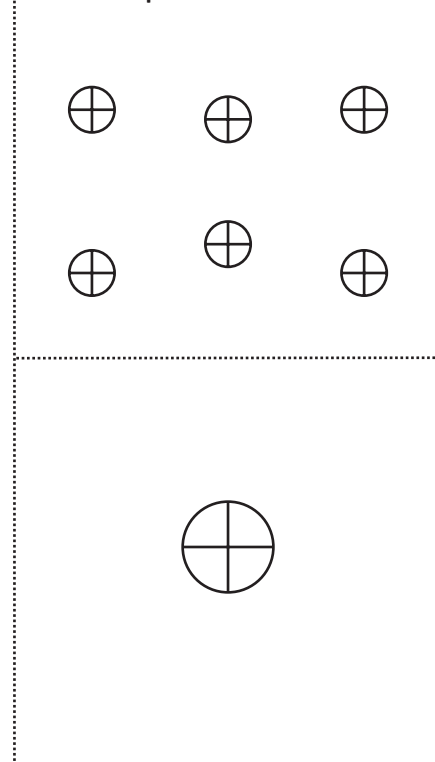

Resistors

R1	1M
R2	470K
R3	4K7
R4	820R
R5	47K
R6	1K
R7	1K2
R8	10R
R9	470K
R10	470K
R11	33K

Capacitors

C1	220p
C2	150n
C3	22p
C4	100n
C5	470n
C6	100n
C7	220n
C8	4u7
C9	47n
C10	47uF
C11	47uF

Diodes

D1	4007
D2	4007
D3	1N914
D4	1N914
D5	4007
LED	LED5MM

(Solder on cooper side)
SW (Solder on cooper side)
HOT SPST

OPAMP

IC1	4558
-----	------

Pots (Solder on cooper side)

LEVEL	100KB
FAT	50KC
TONE	10KB
GAIN	50KA

