


REV.	DESCRIPTION	DATE	APPROVED
A	EC #1170	1-8-93	MH
B	EC #2058	4-20-98	FM

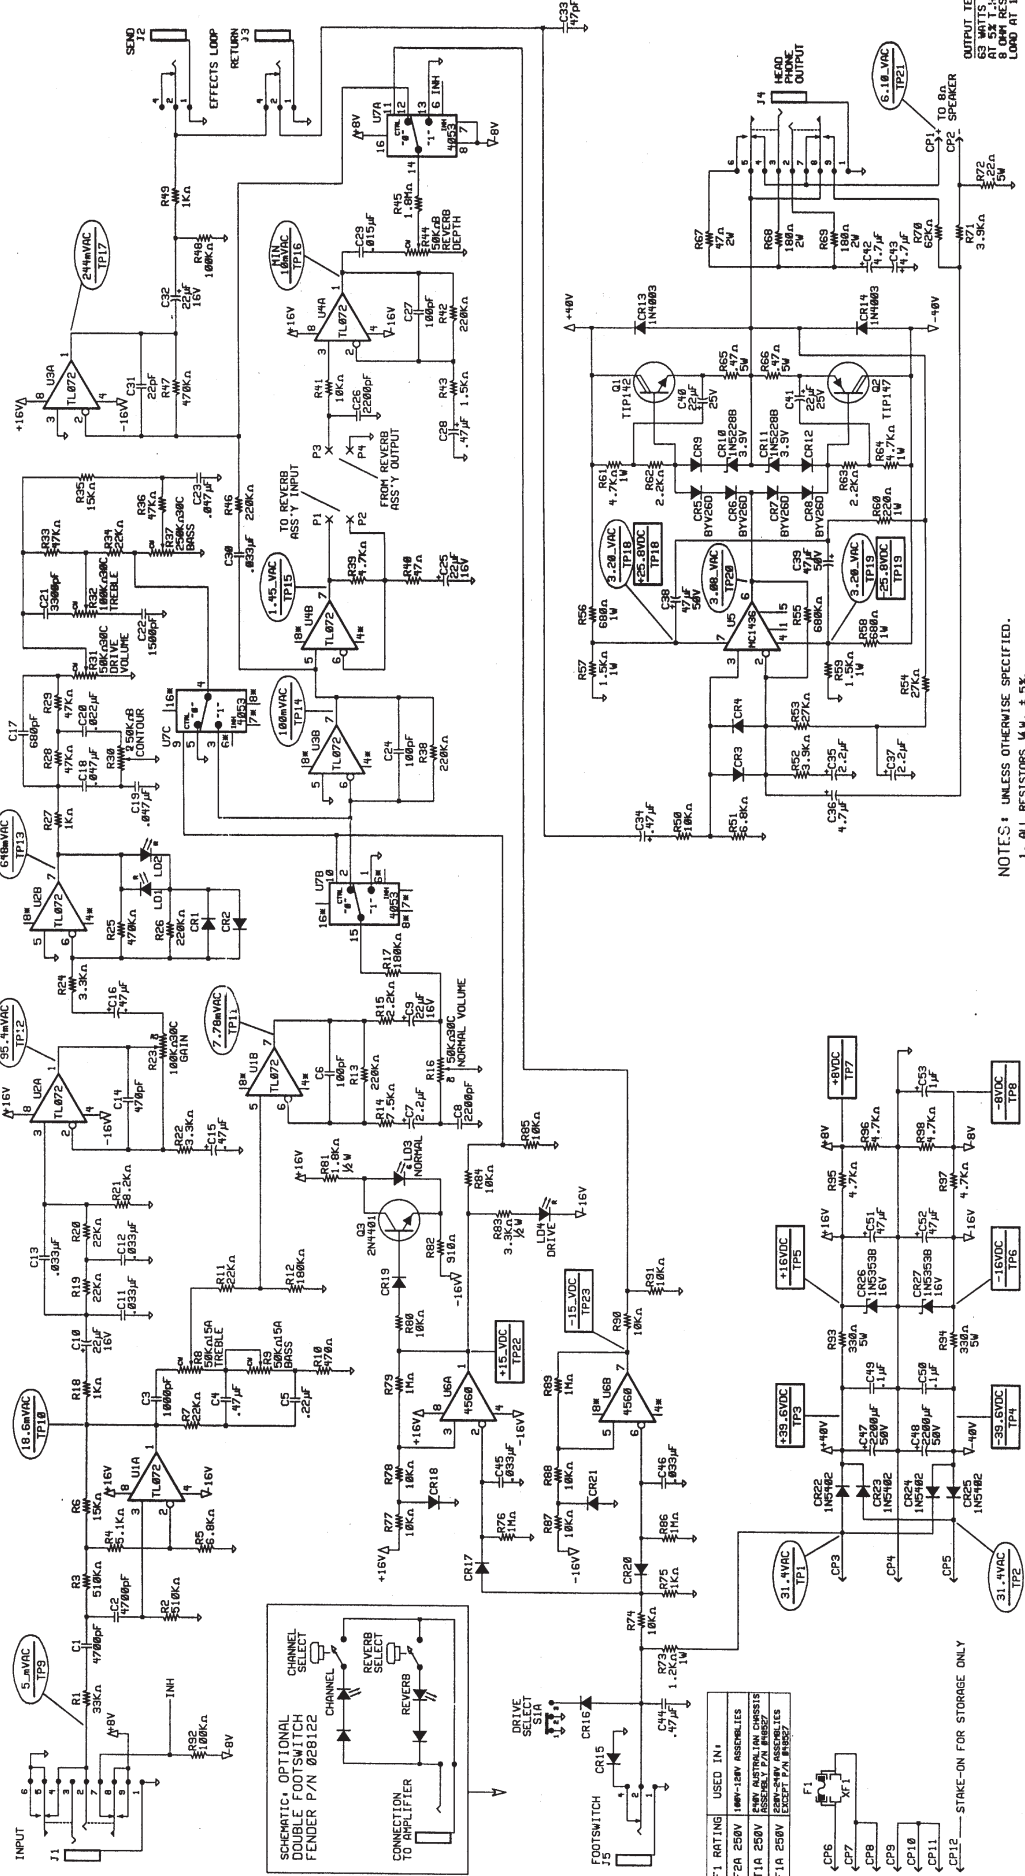

NOTES: UNLESS OTHERWISE SPECIFIED.
 1. ALL CAPACITORS 35V MINIMUM.
 2. ALL DIODES 1N4148.
 3. ALL DIODES 1N4001.
 4. AC AND DC VOLTAGES READ TO
 FOLLOWING CONDITIONS:
 1KHZ INPUT AT J1
 8Ω RESISTIVE LOAD CONNECTED AT CPI-OP2
 DRIVE SELECT "ON"
 GAIN SET TO 9.0 CLOCK
 ALL OTHER CONTROLS SET TO 12.0 CLOCK

DATE	BY	DATE	BY
4-22-98	FM	4-22-98	FM
4-22-98	FM	4-22-98	FM
4-22-98	FM	4-22-98	FM

DATE	BY	DATE	BY
4-22-98	FM	4-22-98	FM
4-22-98	FM	4-22-98	FM
4-22-98	FM	4-22-98	FM

DATE	BY	DATE	BY
4-22-98	FM	4-22-98	FM
4-22-98	FM	4-22-98	FM
4-22-98	FM	4-22-98	FM

DATE	BY	DATE	BY
4-22-98	FM	4-22-98	FM
4-22-98	FM	4-22-98	FM
4-22-98	FM	4-22-98	FM